SERVICE MANUAL

KENWOOD

KL-999DX

SPEAKER SYSTEM

EXTERNAL VIEW

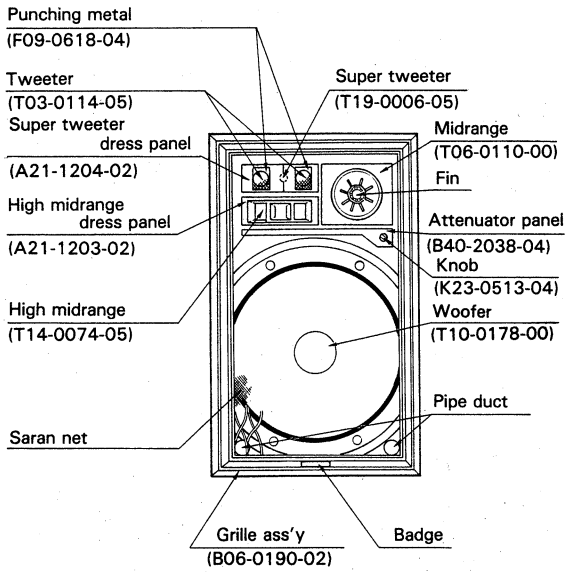

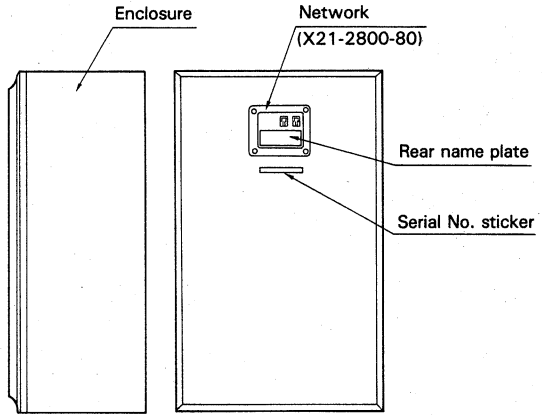

Note: When replacing the attenuator remove the attenuator panel.

PACKING

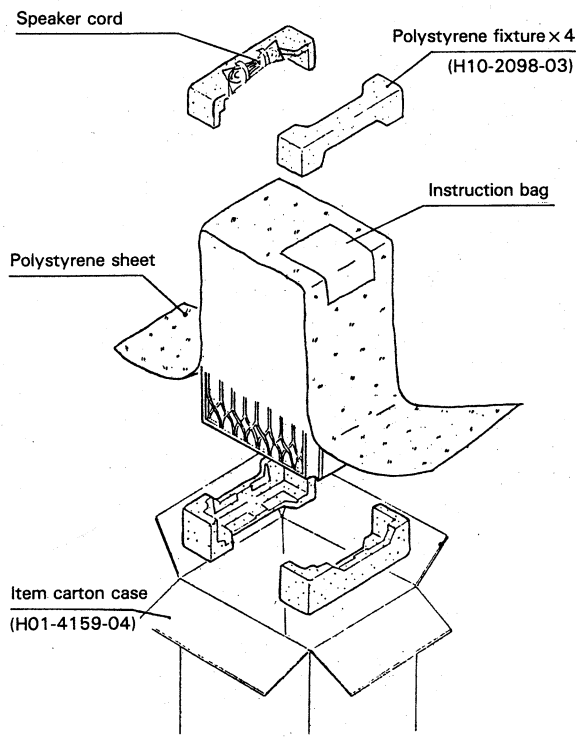

SPECIFICATIONS

System ..... 4 Way, 6 Speakers
Mounted Drivers
Low Frequency ..... 432mm (17") Cone Type
Mid-Frequency ..... 165mm (6-1/2") Cone Type with Aluminum Die-Cast Alloy Radiator
High Frequency ..... Exponential Horn Type with Diffuser
Super High Frequency ..... 63mm (2-1/2") Cone Type with Protector and 20mm (3/4") ø Piezoelectric Dome Type
Enclosure ..... Bass-Reflex
Maximum Input Power ..... 350 Watts
Nominal Input Power ..... 175 Watts
Sensitivity ..... 98dB/W at 1m
Frequency Response ..... 20Hz to 30,000Hz
Crossover Frequencies 1,000Hz, 5,000Hz, 10,000Hz
Impedance ..... 8 ohms
Additional Features ..... 3-Step Acoustic Level Control (Normal-Soft 1-Soft 2) One-Touch Connection Sp. Terminals
Dimensions ..... W 445mm (17-1/2") H 690mm (27-5/32") D 272mm (10-11/16")
Weight (Net) ..... 20.0kg (44.0 lbs)/pc.
Enclosure Finish ..... Top, Sides and Bottom are Simulated Walnut Grain Finish.

KL-999DX

PARTS LIST/SCHEMATIC DIAGRAM

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
KL-999DX						
-		*	A21-1203-02	HIGH MIDRANGE DRESS PANEL		
-		*	A21-1204-02	SUPER TWEETER DRESS PANEL		
-		*	B06-0190-02	GRILLE ASSY		
-		*	B40-2038-04	ATTENUATOR PANEL		
-			B46-0094-03	WARRANTY CARD	UH[UE]	
-			B46-0095-03	WARRANTY CARD	U	
-			B46-0098-03	WARRANTY CARD	E	
-		*	B50-7035-00	INSTRUCTION MANUAL(3LIN)	UMH	
-		*	B50-7035-00	INSTRUCTION MANUAL(3LIN)	[UE]	
-		*	B50-7053-00	INSTRUCTION MANUAL(5LIN)	E	
-			E30-1003-05	SPEAKER CORD		
-		*	F09-0618-04	PUNCHING METAL		
-		*	H01-4159-04	ITEM CARTON CASE		
-			H10-2098-03	POLYSTYRENE FIXTURE		
-			K23-0513-04	KNOB		
-			T03-0114-05	TWEETER		
-		*	T06-0110-00	MIDRANGE		
-		*	T10-0178-00	WOOFER		
-			T14-0074-05	HIGH MIDRANGE		
-			T19-0006-05	SUPER TWEETER		
NETWORK (X21-2800-80)						
C1 ,2			C90-0671-05	NP-ELEC 3.3UF 100WV		
C3			C90-0674-05	NP-ELEC 8.2UF 100WV		
-			E29-0705-05	TERMINAL BOARD		
L1		*	L38-0190-05	COIL 0.22MH		
L2		*	L38-0193-05	COIL 0.47MH		
L3		*	L38-0202-05	COIL 0.33MH		
R1			R92-0815-05	WIRE WOUND 1 K 4A		
R2 ,3		*	R92-0872-05	WIRE WOUND 2.2 K 4A		
S1			S01-1206-05	ROTARY SWITCH		

E: Scandinavia & Europe H:Audio Club K: USA P: Canada S: South Africa T: England U: PX(Far East, Hawaii)
[UE]: AAFES(Europe) X: Australia M: Other Areas

SCHEMATIC DIAGRAM

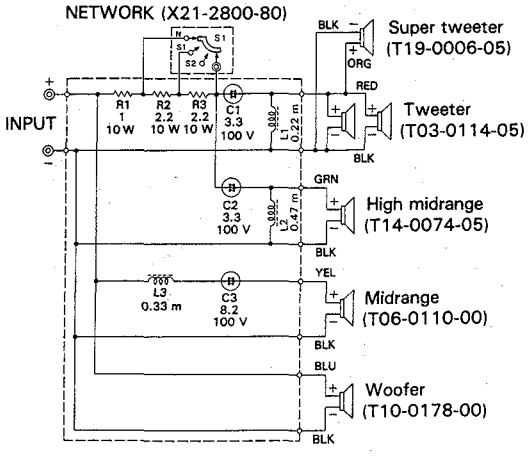

TRIO-KENWOOD CORPORATION
Shionogi Shibuya Building, 17-5, 2-chome Shibuya, Shibuya-ku, Tokyo 150, Japan

© 1983-4 PRINTED IN JAPAN B51-1456-00 (T) 1702